

High Efficient Soft Mounted Washer Extractor **XP**



FEATURES


- Freestanding, high spin (Up to 980 RPM _ XP 18)
- Stainless steel top panel & anthracite grey front and side panels
- Stainless steel drum and tub
- Xcontrol - Fully programmable
- Patented Soap Hopper
- 3rd water inlet
- Large drain valve (Ø 76 mm)
- Easy access to all vital parts from the front
- Large door opening for easy loading & unloading(Ø 460 mm)
- Easy Soap - liquid soaps connection
- Wet Cleaning

OPTIONS

- Xcontrol Plus - Fully programmable
- Coin operated timer (CPS)
- G Factor 400
- Stainless steel front and side panels
- USB plug (on the back panel)
- Liquid soap pumps
- Water recovery kit
- Steam heating version
- Trace - Tech system



Type		XP 18	XP 24	XP 28
INNERDRUM				
Maximum capacity 1:9	kg	20	27	32
Capacity 1:10	kg	18	24	28
Volume	l	180	240	280
Diameter	mm	Ø750	Ø750	Ø750
DRUM SPEED				
Wash	rpm	42	42	42
Extraction	rpm	980	980	915
G - FACTOR				
		350	350	350
HEATING				
Electricity (Standard)	kW	12/18	18	22
Hot water	°C	90	90	90
Steam	bar	1-8	1-8	1-8
MOTOR				
	kW	2,2	3	3
Sound pressure level	dB(A)	<65	<65	<65
Water valves connection	BSP	3/4"	3/4"	3/4"
Water pressure	kPa	100-800	100-800	100-800
Rec. water pressure	kPa	300-500	300-500	300-500
Water inlet	l/min	20	20	20 - 50
Drain valve	outer Ø mm	76	76	76
Flow amount with drain valve	l/min	210	210	210
Steam valve connection	BSP	1/2"	1/2"	1/2"
Steam pressure	kPa	100-800	100-800	100-800
DIMENSIONS				
HxWxD	mm	1410x970x970	1410x970x1105	1410x970x1250
TRANSPORT DATA				
Gross	kg	395	450	515
Net	kg	380	430	470
Volume	m3	1,95	2,18	2,43
Packed (HxWxD)	mm	1550x1025x1015	1550x1025x1150	1590x1025x1225

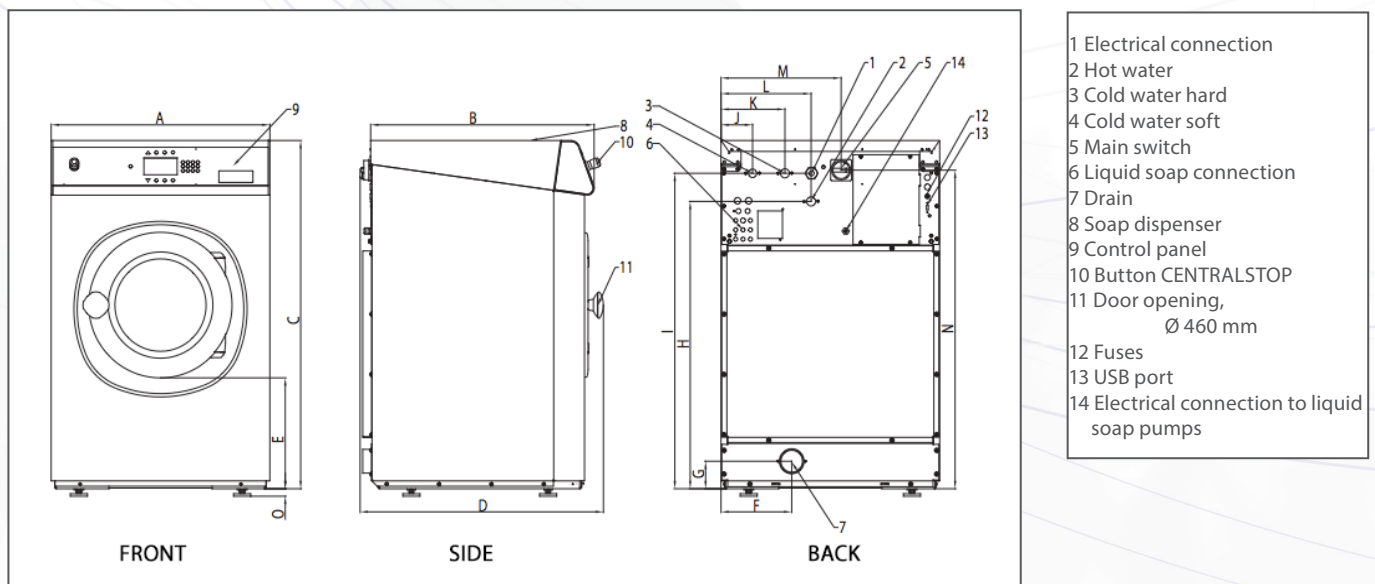

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
XP 18	970	970	1410	906	477	270	108,5	1215	1297,5	102,5	208	293	610	1315	24
XP 24	970	1105	1410	1041	477	270	108,5	1215	1297,5	102,5	208	293	610	1315	24
XP 28	970	1185	1410	1116	477	270	108,5	1215	1305	102,5	208	293	610	1315	24
	width	depth	height												