

# High Efficient Soft Mounted Washer Extractor **XP**



## FEATURES

- Freestanding, high spin (up to 1165 RPM - XP 8)
- Stainless steel top panel & Anthracite grey front and side panels
- Stainless steel drum and tub
- Xcontrol - Fully programmable
- Patented Soap Hopper
- 3rd water inlet
- Large drain valve (Ø 76 mm)
- Easy access to all vital parts from the front
- Large door opening for easy loading & unloading

**XP 8: Ø 330 mm**

**XP 11-14: Ø 410 mm**


- Easy Soap - liquid soaps connection
- Wet Cleaning

## OPTIONS

- Xcontrol Plus - Fully programmable
- Coin operated timer (CPS)
- G Factor 400
- Stainless steel front and side panels
- USB plug (on the back panel)
- Liquid soap pumps
- Water recovery kit
- Steam heating version
- Drain pump (XP 8)
- Trace - Tech system



Type		XP 8	XP 11	XP 14
<b>INNERDRUM</b>				
Maximum capacity 1:9	kg	9	12	15
Capacity 1:10	kg	8	11	14
Volume	l	75	105	135
Diameter	mm	Ø530	Ø620	Ø620
<b>DRUM SPEED</b>				
Wash	rpm	49	49	49
Extraction	rpm	1165	1075	1075
<b>G - FACTOR</b>				
		350	350	350
<b>HEATING</b>				
Electricity ( <b>Standard</b> )	kW	6/9	6/9/12	6/9/12
Hot water	°C	90	90	90
Steam	bar	1-8	1-8	1-8
Motor	kW	0,75	1, 1	1,5
Sound pressure level	dB(A)	<65	<65	<65
Water valves connection	BSP	3/4"	3/4"	3/4"
Water pressure	kPa	100-800	100-800	100-800
Rec. water pressure	kPa	300-500	300-500	300-500
Water inlet	l/min	20	20	20
Drain valve	outer Ø mm	76	76	76
Flow amount with drain valve	l/min	210	210	210
Steam valve connection	BSP	1/2"	1/2"	1/2"
Steam pressure	kPa	100-800	100-800	100-800
<b>DIMENSIONS</b>				
HxWxD	mm	1115x710x790	1225x795x795	1225x795x945
<b>TRANSPORT DATA</b>				
Gross	kg	200	235	275
Net	kg	185	210	255
Volume	m3	0,78	0,94	1,10
Packed (HxWxD)	mm	1245x750x840	1345x835x840	1345x835x985

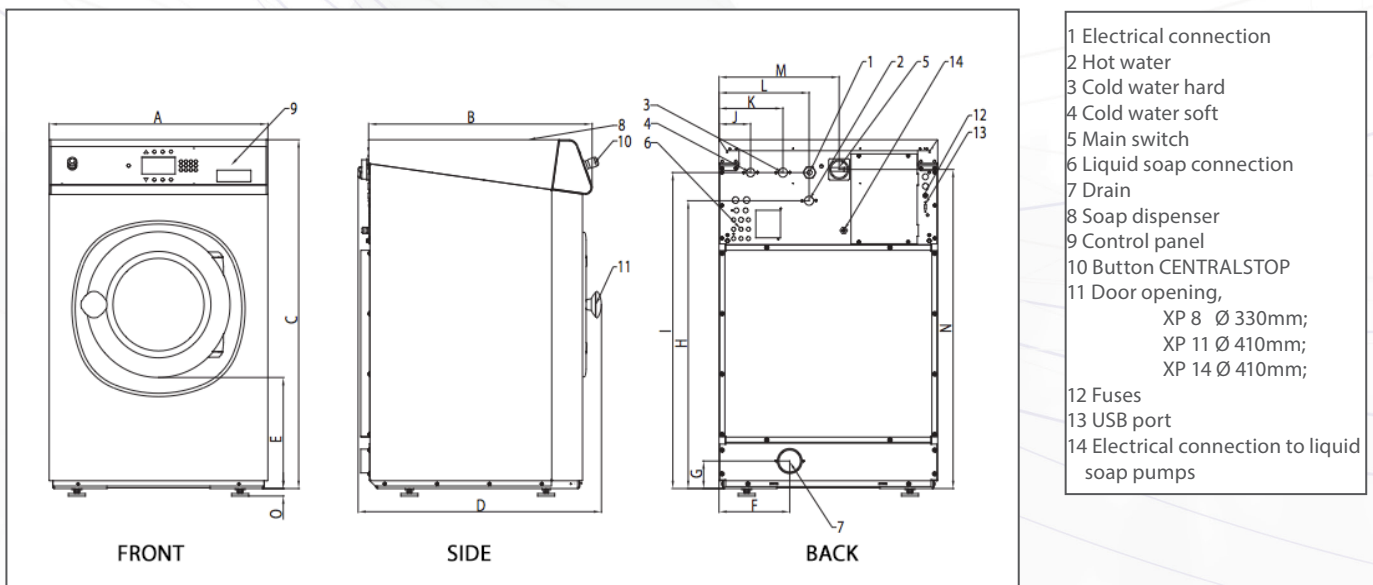

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
XP 8	710	726	1115	790	355	230	88	920	1010	113	218	293	390	1020	24
XP 11	795	761	1225	795	342	230	88	1030	1020	103	208	293	475	1130	24
XP 14	795	911	1225	945	342	230	88	1030	1020	103	208	293	475	1130	24
	width	depth	height												

		XP 8
Water consumption	l/kg	7,2
Electricity consumption	kWh/kg	0,19

\* Program N° 11

The company TECNITRAMO preserves the right to change the machines and the specifications in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding

